





RoHS
Compliance



SCHMATIC



PCB LAYOUT

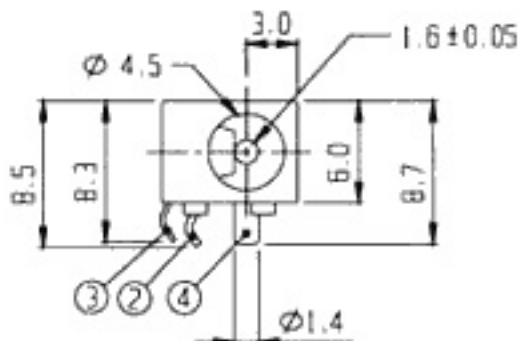

NO.	PART	MATERIAL	QTY	REMARKS
4	CENTER PIN	BRASS	1	Ag PLATED
3	SPRING PLATE	CuBe	1	Ag PLATED
2	FIXED PLATE	BRASS	1	Ag PLATED
1	FRAME	A B S	1	

ISSUED

SPECIFICATION

TITLE: DC POWER JACK

RATING: DC 30V 0.3A

CONTACT RESISTANCE: 50mΩ max.

INSULATION RESISTANCE: 100MΩ AT 500V DC

WITHSTAND VOLTAGE: AC 500V for 1 minute

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 5M cycles (15-18 cycles/min unloading)

MODEL NO: DC-014

TOLERANCE UNIT: MM

UP TO 1.0:±0.1 SCALE: 2.5:1

1.0 TO 10.0:±0.2 VERSION: 3

OVER 10.0:±0.3 DRWG NO:

DWN.

CHK'D.

APPD.



hoo
m
[Signature]