

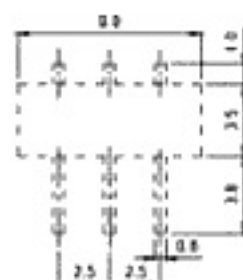
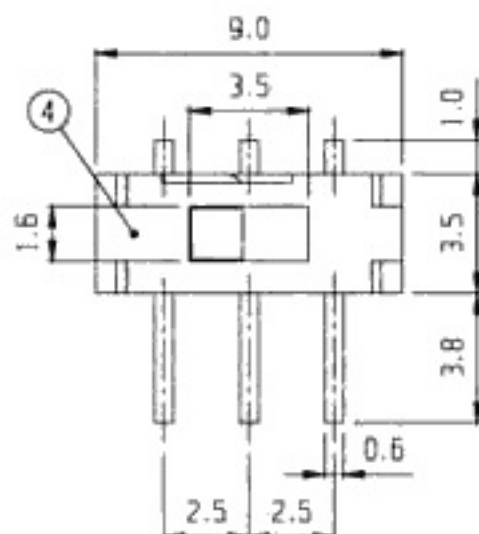


SCHMATIC

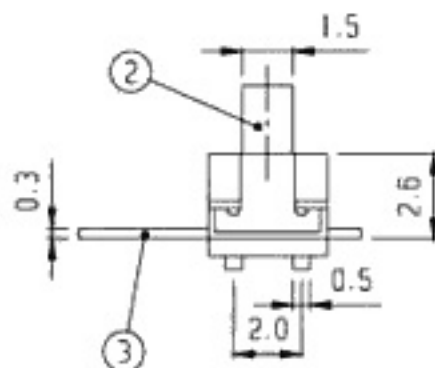

P.C.B. LAYOUT

RoHS
Compliance

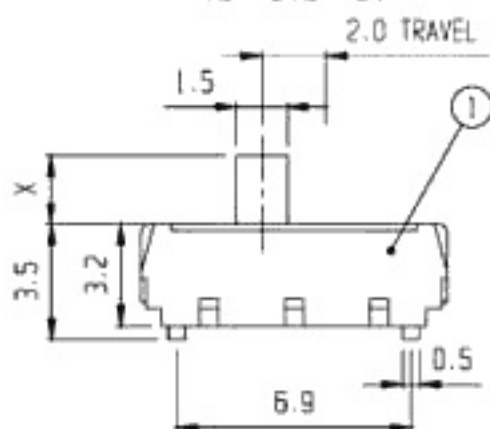

5	CONTACT	P B S	1	Ag PLATED					
3	TERMINAL	BRASS	3	Ag PLATED	4	COVER BOARD	S U S	1	
1	FRAME	NYLON	1		2	KNOB	NYLON	1	
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: MINIATURE SLIDE SWITCH (1P2T)

RATING: DC 12V 0.1A
 CONTACT RESISTANCE: 70mΩ max.
 INSULATION RESISTANCE: 100MΩ AT 500V DC
 WITHSTAND VOLTAGE: AC 100V for 1 minute
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 10K cycles min.

MODEL NO: MSS-12D19

TOLERANCE UNIT: MM
 UP TO 1.0: ±0.1
 1.0 TO 10.0: ±0.2
 OVER 10.0: ±0.3
 SCALE: 5:1
 VERSION: 02
 DRWG NO:

DWN. *hoo*
 CHK'D. *per*
 APPD. *[Signature]*

