

SCHEMATIC



PCB LAYOUT

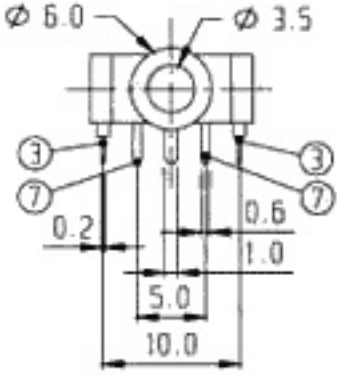

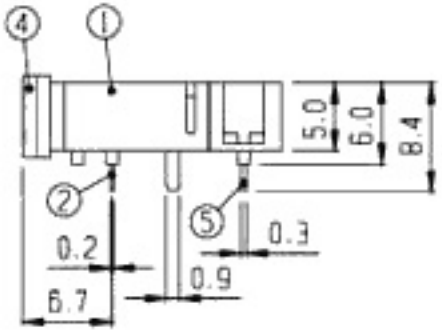

RoHS Compliance

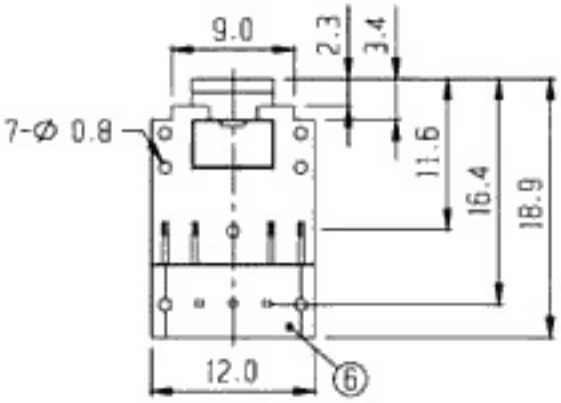

NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS
7	CONTACT	BRASS	2	Ag PLATED					
5	TERMINAL	BRASS	3	Ag PLATED	6	TERMINAL BASE	PHENOL RESIN	1	NATURAL
3	CONTACT	S U S	2	Ag PLATED	4	SHEATH	BRASS	1	Ni PLATED
1	FRAME	P O M	1		2	TERMINAL	P B S	1	Ag PLATED

ISSUED	SPECIFICATION	TITLE:3.5mm STEREO JACK (1.1)			
	RATING: DC 30V 0.3A	MODEL NO: ST-35071			
	CONTACT RESISTANCE: 50mΩ max.				
	INSULATION RESISTANCE: 100MΩ AT 500V DC	TOLERANCE	UNIT: MM	DWN.	
	WITHSTAND VOLTAGE: AC 500V for 1 minute	UP TO 1.0:±0.1	SCALE:2:1	CHK"D.	
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 2		
	SWITCHING LIFE:5K cycles(15-18 cycles/min unloading)	OVER 10.0:±0.3	DRWG NO:	APPD.	