

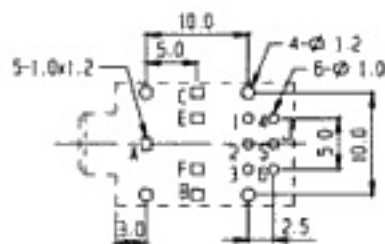
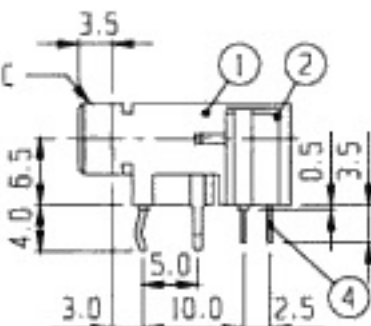


SCHMATIC

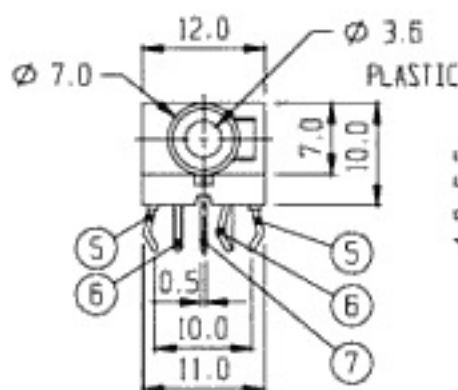

PCB LAYOUT

RoHS  
Compliance

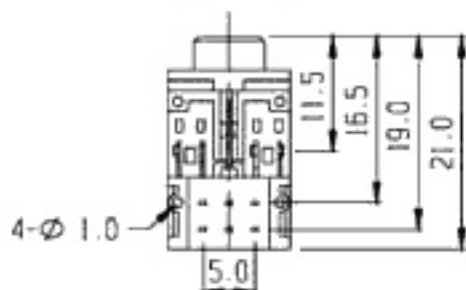

NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS
7	TERMINAL	BRASS	1	Ag PLATED	6	TERMINAL	BRASS	2	Ag PLATED
5	CONTACT	PBS-SH	2	Ag PLATED	4	TERMINAL	BRASS	6	Ag PLATED
3	COVER BOARD	P O M	1		2	FRAME	P B T	1	
1	FRAME	P B T	1						

ISSUED

SPECIFICATION

TITLE: 3.5mm STEREO JACK

RATING: DC 30V 0.3A  
 CONTACT RESISTANCE: 50mΩ max.  
 INSULATION RESISTANCE: 100MΩ AT 500V DC  
 WITHSTAND VOLTAGE: AC 500V for 1 minute  
 OPERATION FORCE: REFER ATTACH SPECIFICATION  
 SWITCHING LIFE: 5K cycles min

MODEL NO: ST-35562-02

TOLERANCE: UP TO 1.0:±0.1  
 UNIT: MM  
 SCALE: 1.5:1  
 VERSION: 1  
 DRWG NO:



DWN.  
 CHK'D.  
 APPD.