

MATING PLUG

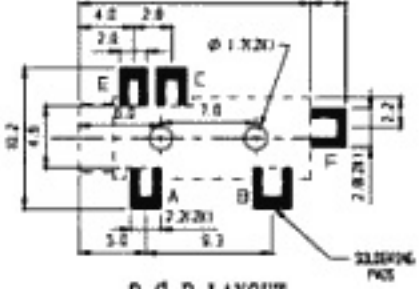

P.C.B.LAYOUT



SCHEMATIC

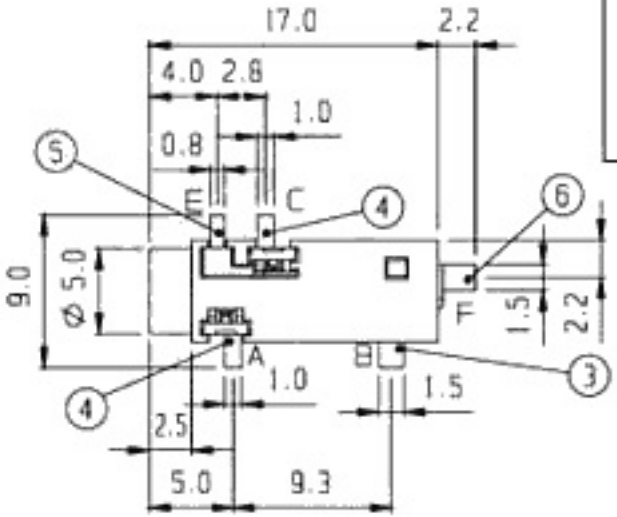

RoHS Compliance

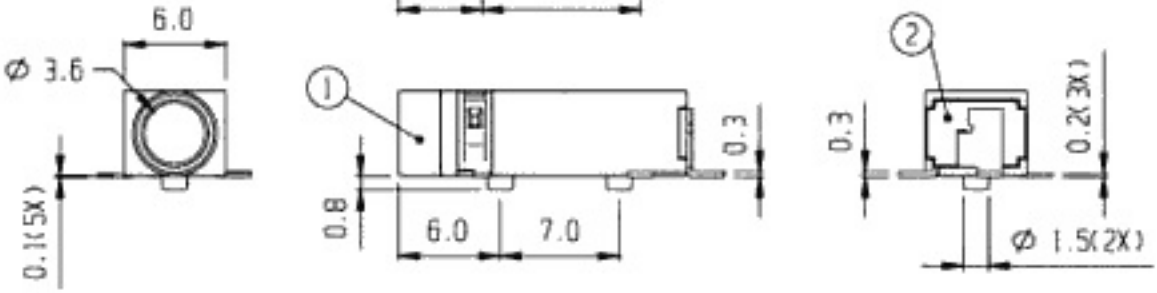

NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS
5	TERMINAL	BRASS	1	Ag-PLATING	6	TERMINAL	BRASS	1	Ag-PLATING
3	TERMINAL	CuBe	1	Ag-PLATING	4	TERMINAL	CuBe	2	Ag-PLATING
1	FRAME	NYLON 6T	1		2	COVER BOARD	NYLON 6T	1	

ISSUED	SPECIFICATION	TITLE: 3.5mm SMD STERED JACK			
	RATING: DC 30V 0.3A	MODEL NO: STM-35095A			
	CONTACT RESISTANCE: 50mΩ max.				
	INSULATION RESISTANCE: 100MΩ AT 500V DC	TOLERANCE	UNIT: MM	DWN.	
	WITHSTAND VOLTAGE: AC 500V for 1 minute	UP TO 1.0:±0.1	SCALE: 2.5:1	CHK'D.	
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 2		
	SWITCHING LIFE: 5,000 cycles min.	OVER 10.0:±0.3	DRWG NO:	APPD.	