





SCHEMATIC



P.C.B. LAYOUT

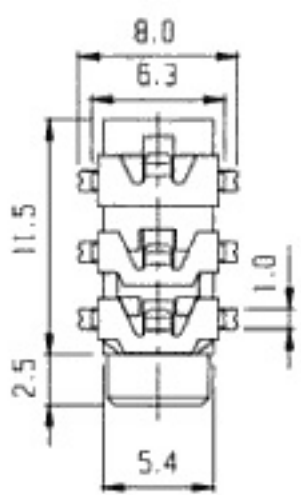

RoHS
Compliance

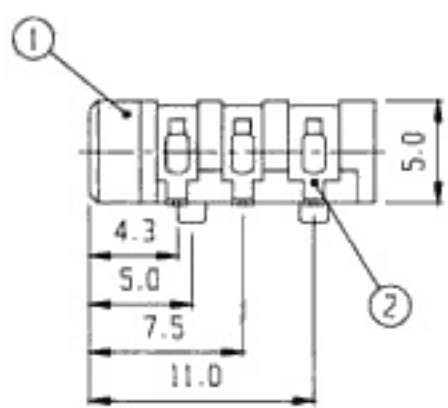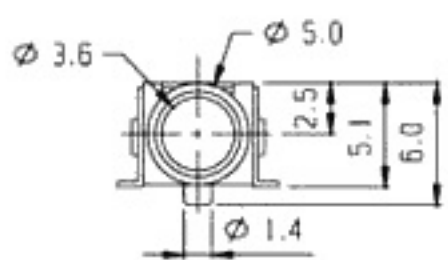

2	CONTACT	P B S	2	Ag PLATED
1	FRAME	NYLON 46	2	
NO.	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE: 3.5mm SMD STERED JACK		
	RATING: DC 30V 0.3A	MODEL NO: STM-35133A		
	CONTACT RESISTANCE: 50mΩ max.	TOLERANCE	UNIT: MM	DWN.
	INSULATION RESISTANCE: 100MΩ AT 500V DC	UP TO 1.0:±0.1	SCALE: 3:1	CHK'D.
	WITHSTAND VOLTAGE: AC 500V for 1 minute	1.0 TO 10.0:±0.2	VERSION: 01	APPD.
	OPERATION FORCE: REFER ATTACH SPECIFICATION	OVER 10.0:±0.3	DRWG NO:	
SWITCHING LIFE: 5K cycles min.				