

RECOMMENDED P.C.B. PATTERN LAYOUT(T)=1.6±0.1

NOTE:

1. MATERIALS AND FINISH

1.1 HOUSING&KEY:

TEMP. PLASTIC, UL 94V-0 RATED.

1.2 CONTACTS:

COPPER ALLOY.

GOLD ON CONTACT AREA,

120u" MIN TIN PLATING ON SOLDER TAILS,

BOTH OVER 50u" MIN NICKEL ALL OVER.

1.3 SHIELD:

COPPER ALLOY.

PLATING NICKEL 80u" MIN ALL OVER.

1.4 RECOMMENDED SCREWMING TORQUE:

φ0.343N-M(3.5kgf-cm)


TORQUE LIMIT: φ. 392N-m(4.0kgf-cm)

2. DIMENSIONS SHALL BE INTERPRETED PER

MIL-STD-105E II

3. PRODUCT CODE:

HF 19 R 1 1-11 2 1 1 15

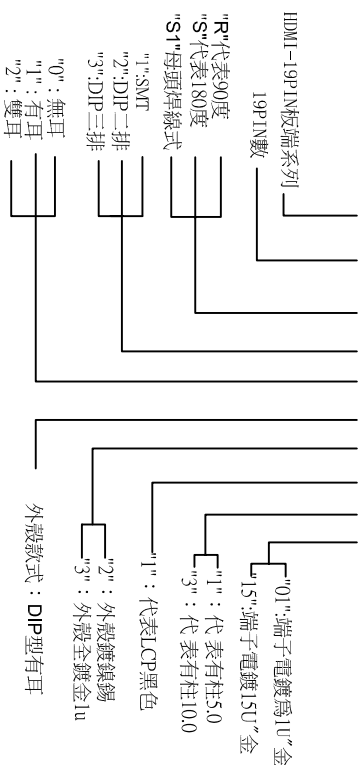

未標示公差尺寸值		DRAWN BY		聶玉忠	
METRIC		DESIGNED BY			
.0±0.35		APPROVAL BY			
.00±0.25		DRAW NO		COSJ-129	
.000±0.15		UNIT		mm	
TITLE: HDMI 板端有耳(膠柱5.0)		SCALE		1:1	
PRODUCT NO: HF19R11-1121115		REV		A/0	
FILE NO: ZK-3-D-001					