
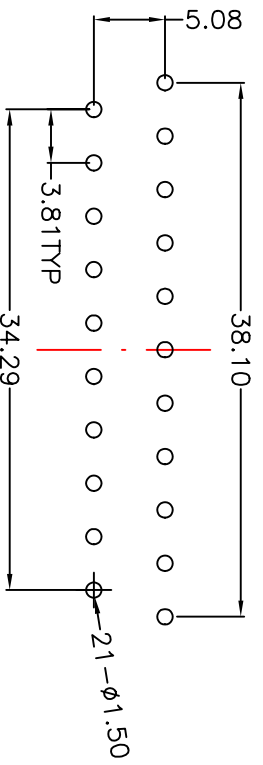
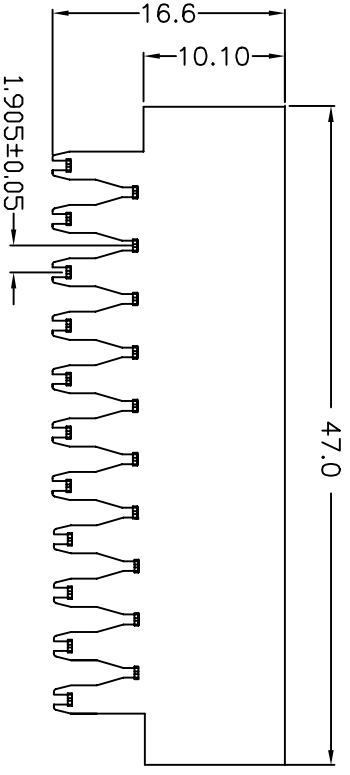
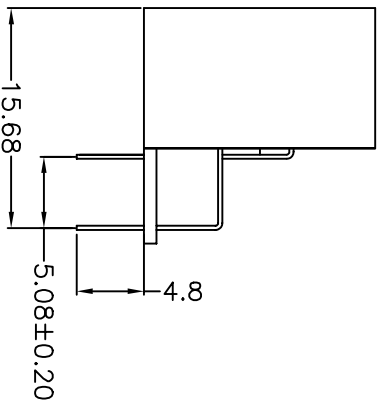


REV.	NOTES	DATE
A	RELEASED	2006/12/29

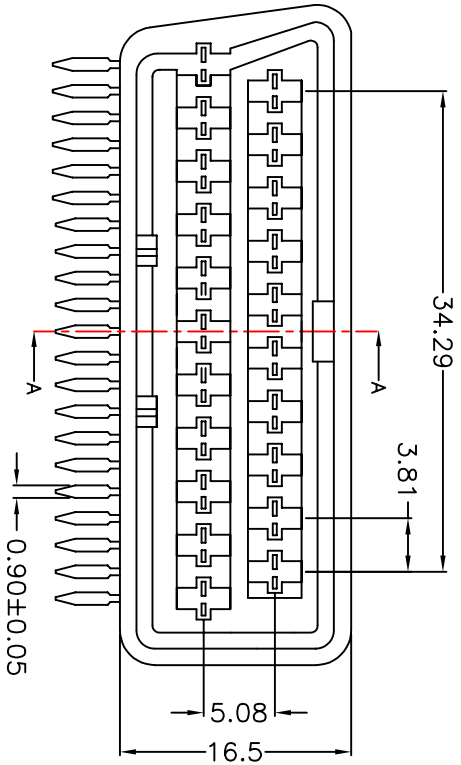

PCB LAYOUT

- NOTES:
1. MATERIALS
- 1.1 Insulator: Pc
 - 1.2 Contact: Brass
 - 1.3 Contact Plating: Tin Plated
2. SPECIFICATIONS
- 2.1 Current Rating: 3.0 Amp
 - 2.2 Contact Resistance: 25m Ohms max
 - 2.3 Dielectric Strength: 1000V AC for one minute
 - 2.4 Insulator Resistance: 1000MΩ Min. (at 500V DC)
 - 2.5 Operation Temperature: -55°C to +105°C

Part No.	Material	Plated
ASC+0390-40C	PC	Tin Plated
ASC+0390-40B	PB	Tin Plated

單位 (UNITS)	mm
數量 (QTY)	N/A
材料 (M'T'L)	SEE NOTE
處理 (FINISH)	SEE NOTE
繪圖 (DRAW)	
設計 (DE'N)	
審核 (CH'K)	
核准 (APP' D)	

圖名 (NAME)	
料號 (PART NUMBER)	ASC+0390-40C
圖號 (DRAW NUMBER)	RASC039040C
圖檔 (FILE NAME .DWG)	E:GCT/A/SC/03
比例 (SCALE)	1/1
圖紙 (SHEET)	A4
頁次 (SHEET)	1
版本 (REV.)	A

DIMENSIONS TOLERANCE

METRIC
 0 = ±.25
 .00 = ±.15
 .0000 = ±.XXX
 ANG. = ±2°

