


REV.	NOTES	DATE
A	RELEASED	2005/10/04
B	增加料號:ASC+0840-10C	2005/10/31
C	增加料號:ASC+0840-20C	2006/06/16
D	21-50變更爲1.5;46;98變更爲46;50;42;90變更爲42;50 增加電阻阻值PCB板孔ø1.5變更爲ø1.3	2006/11/18
E	端子阻抗由25Ω代替30Ω	2006/12/08

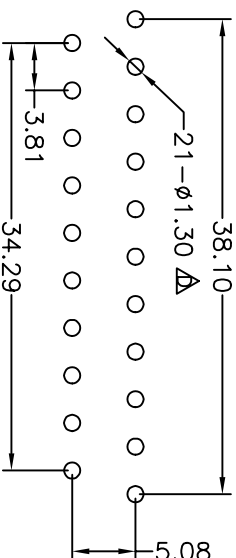

RECOMMEND P.C.BOARD LAYOUT

- NOTES:
- MATERIALS
    - Insulator:PC
    - Contact:Brass,NICKEL(50U"),0.3T;  
TIN(100~120U") PLATED;

- SPECIFICATIONS
  - Current Rating: 3 Amp
  - Dielectric Strength:1000V AC for one minute
  - Insulator Resistance:1000M ohms Min
  - Contact Resistance:25m ohms Max
  - Operation temperature:-55°C to +105°C
  - INSERTION FORCE:9.0KG MAX
  - WITHDRAW FORCE:1.5KG MIN

PART NO.	CONTACT PLATING	COLOR
ASC+0840-40C	TIN PLATED	BLACK
ASC+0840-10C	GOLD PLATED	BLACK
ASC+0840-20C	GOLD/TIN PLATED	BLACK

單位(UNITS)	mm
數量(QTY)	N/A
材料(MTL)	SEE NOTE
處理(FINISH)	SEE NOTE

DIMENSIONS TOLERANCE

- METRIC
- 0 = ±.3
  - .00 = ±.20
  - .000 = ±.XXX
  - .0000 = ±
  - ANG. = ±2°

繪圖(DRAW)		圖名(NAME)			
設計(DE'N)		180度母座錫 無耳 無毒			
審核(CH'K)		料號(PART NUMBER)	ASC+0840-40C		
核准(APP'D)		圖號(DRAW NUMBER)	RASC084040C		
		圖檔(FILE NAME .DWG)	E:QCT/A/SC/08		
		比例(SCALE)	1/1	圖紙(SHEET)	A4
				頁次(SHEET)	1
				版本(REV.)	E