

# ROHS

REV	DESCRIPTION	MODIFICATION	DATE
A/0	新制定		06.11.04

\*MATERIAL  
 BODY : PA66+30% UL 94V-0 RATED, COLOR: WHITE  
 CONTACTS : BRASS  
 CONTACT PLATING : GOLD PLATING OVER NICKEL ON CONTACT  
 AREA TIN PLATING ON TERMINAL


\*MECHANICAL  
 MATING FORCE : 4.5 KG MAX. @ 25 MM/MINUTE  
 UNMATING FORCE: 1.0 KG MIN. AND 4.0 KG MAX. @25 MM/MINUTE  
 DURABILITY: 100 MATING CYCLES

\*ELECTRICAL SPECIFICATION  
 INSULATION RESISTANCE : 1000 MEGOHMS MIN  
 DIELECTRIC WITHSTANDING VOLTAGE : 500 V DC RMS ±50 V.60 HZ  
 CURRENT RATING: 1.5 AMPERES MIN  
 SHELL RESISTANCE: 50 MILLOHMS MAX.INITIAL: 50 MILLOHMS  
 MAX.CHANGE FROM INITIAL  
 CONTACT RESISTANCE : 20 MILLOHMS MAX.


\*ENVIRONMENTAL  
 OPERATING TEMPERATURE : -20° TO 85°  
 \*HOW TO ORDER

PART NUMBER :

DF 240 S 1-1-1 0 01 B4

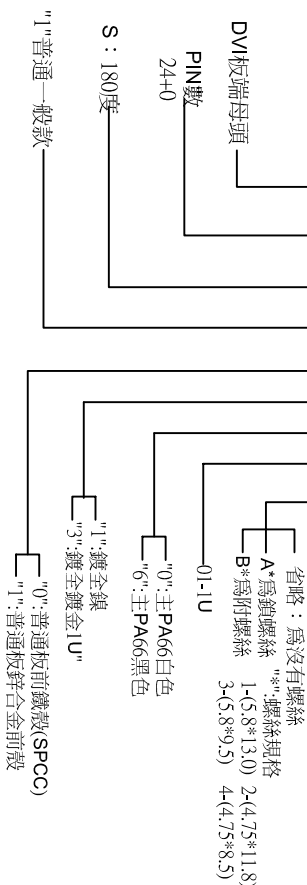

## P.C.B LAYOUT

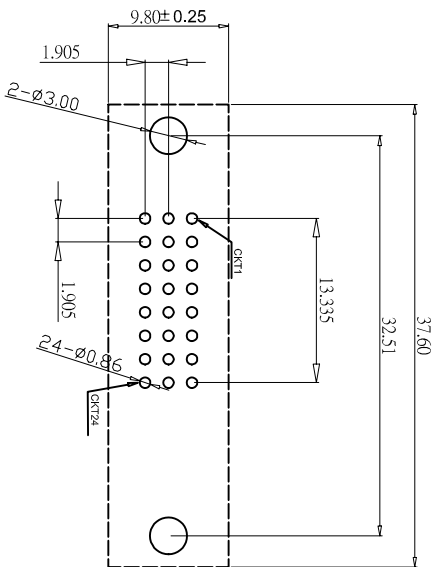

未標示公差尺寸值		TITLE:		DRAWN BY		FAN SHA	
METRIC		DVI(24+0)F180(鍍)度附4.75*8.50		CHECKED			
.0=±0.35		PRODUCT NO:		APPROVED			
.00=±0.25		DF240S1-11001B4		DRAW NO		COST-459	
.000=±0.15		FILE NO:		UNIT		mm	
		ZK-3-D-001		SCALE		1:1	
		SCALE		REV		A/0	