

# RoHS

REV	DESCRIPTION	MODIFICATION	DATE
A0	新制定		05.06.19
A1	變更一	物料編碼變更	06.05.09

**\*MATERIAL**  
 BODY : PA66+30% UL 94V-0 RATED, COLOR: BLACK  
 LATCH : PA66+30% UL 94V-0 RATED, COLOR: WHITE  
 CONTACTS : BRASS  
 CONTACT PLATING : GOLD PLATING OVER NICKEL ON CONTACT  
 AREA TIN PLATING ON TERMINAL


**\*MECHANICAL**  
 MATING FORCE : 4.5 KG MAX. @ 25 MM/MINUTE  
 UNMATING FORCE : 1.0 KG MIN. AND 4.0 KG MAX. @ 25 MM/MINUTE  
 DURABILITY : 100 MATING CYCLES

**\*ELECTRICAL SPECIFICATION**  
 INSULATION RESISTANCE : 1000 MEGOHMS MIN  
 DIELECTRIC WITHSTANDING VOLTAGE : 500 V DC RMS ± 50 V.60 HZ  
 CURRENT RATING : 1.5 AMPERES MIN  
 SHELL RESISTANCE : 50 MILLOHMS MAX. INITIAL; 50 MILLOHMS  
 MAX.CHANGE FROM INITIAL  
 CONTACT RESISTANCE : 20 MILLOHMS MAX.

**\*ENVIRONMENTAL**  
 OPERATING TEMPERATURE : -20° TO 85°

**\*HOW TO ORDER**

**PART NUMBER :**

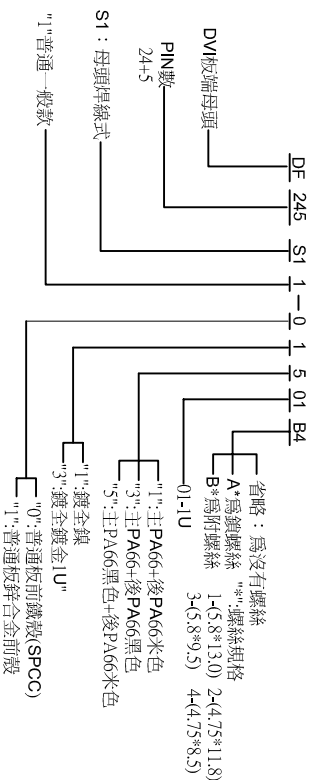

未標示公差尺寸值				DRAWN BY		FAN SHA	
METRIC				DESIGNED BY			
.0=±0.35				APPROVAL BY			
.00=±0.25				DRAW NO		COSI-071	
.000=±0.15				UNIT		mm	
TITLE:		DV(24+5)母線式黑膠附4.75*11.80		SCALE		1:1	
PRODUCT NO:		DF245S11-01501B4		REV		A0	
FILE NO:		ZK-3-D-001		UNIT		mm	
SCALE		1:1		REV		A0	